

LENS HORN ANTENNA

MODEL	FREQUENCY RANGE (GHz)	NOMINAL GAIN	EFFECTIVE APERTURE DIAMETER	VSWR	WEIGHT	ACCURACY OF CONSTRUCTION
EK-TRB/1	10 / 11	20.1dB	100 mm	1.20	1.5 Kg	± 0.5 mm. r.m.s.
EK-TRB/12	11 / 12.7	21.4dB	100 mm	1.20	1.5 Kg	± 0.5 mm. r.m.s.
EK-TRB/13	12.7 / 14.5	22.6dB	100 mm	1.20	1.5 Kg	± 0.5 mm. r.m.s.

The antenna is equipped with circular wave guide input that allows a direct connection to an Eurotek outdoor unit.
If you need a WR-75 waveguide connection, it is necessary to use the optional adapter (Cod. 601-000712).
The Support and protection Cover in galvanized iron with pole fastening $\varnothing 114$ mm (EK-ST/1) it is not included.




ALL4DIGIT
SYSTEM

DVB
Digital Video
Broadcasting

MECHANICAL SPECIFICATIONS

Front View

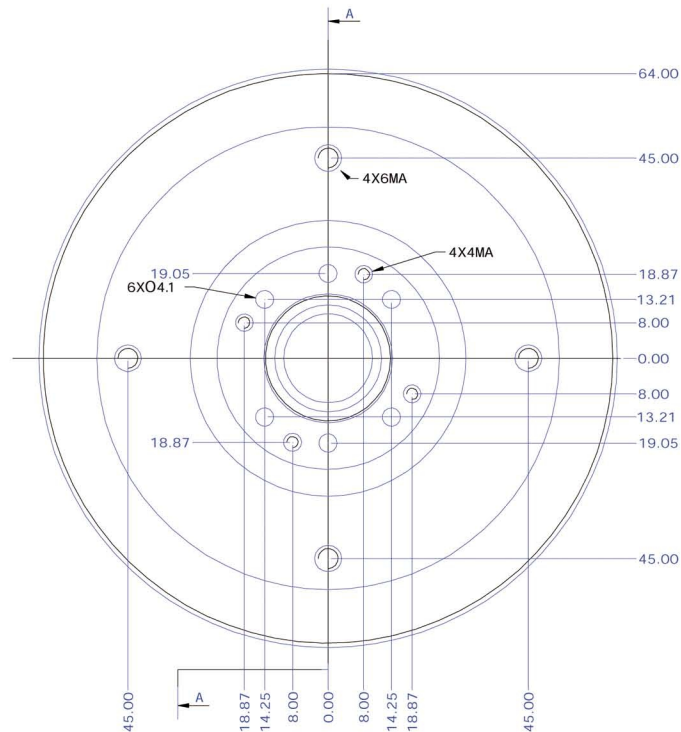

Section View

